

FABRIJET

FT-1608 / FT-1908 SE

6/8 COLOR DYE SUBLIMATION

with **Fluorescent** inks



FABRIJET
FT-1608 SE

Print Speed	57 m ² /hr	39 m ² /hr	41 m ² /hr	29 m ² /hr
Print Resolution	720 x 360dpi 2 Pass	360 x 1,080dpi 3 Pass	540 x 720dpi 2 Pass	720 x 720dpi 4 Pass
Max Print Width	1,630 mm			
Max Media Width	1,650 mm			
Print Mode	Bi-Direction / Uni-Direction, Normal / Interleave			
Printhead	Panasonic printhead (6/8 heads)			
Color	6 Colors (CMYK + Lc, Lm / Fy, Fp) / 8 Colors (CMYK + Lc, Lm, Or, Bl / Fy, Fp, Or, Bl / Lc, Lm, Fy, Fp)			
Ink	DGI original water based Dye Sublimation Ink			
Interface	TCP / IP , USB 3.0			
Environmental Range	Temperature : 22.5~27.5 °C		Humidity : 40~70%	
	Environment condition may affect on final printing quality.			
Electricity Requirements	Single Phase 220V (50/60Hz, AC) Main 5A, 3.3Kw Heater 10A			
Optional equipment	Heavy load take-up system - up to 400m(58g) media loadable / 6 Liter bulk ink tank system			

※ All specifications are subject to change without notice.

FABRIJET
FT-1908 SE


Print Speed	61 m ² /hr	43 m ² /hr	47 m ² /hr	31 m ² /hr
Print Resolution	720 x 360dpi 2 Pass	360 x 1,080dpi 3 Pass	540 x 720dpi 2 Pass	720 x 720dpi 4 Pass
Max Print Width	1,880 mm			
Max Media Width	1,900 mm			
Print Mode	Bi-Direction / Uni-Direction, Normal / Interleave			
Printhead	Panasonic printhead (6/8 heads)			
Color	6 Colors (CMYK + Lc, Lm / Fy, Fp) / 8 Colors (CMYK + Lc, Lm, Or, Bl / Fy, Fp, Or, Bl / Lc, Lm, Fy, Fp)			
Ink	DGI original water based Dye Sublimation Ink			
Interface	TCP / IP , USB 3.0			
Environmental Range	Temperature : 22.5~27.5 °C		Humidity : 40~70%	
	Environment condition may affect on final printing quality.			
Electricity Requirements	Single Phase 220V (50/60Hz, AC) Main 5A, 3.3Kw Heater 10A			
Optional equipment	Heavy load take-up system - up to 400m(58g) media loadable / 6 Liter bulk ink tank system			

※ All specifications are subject to change without notice.

Dimensions for Installation


FABRIJET
FT-1608 SE

Printer	Uncrated				Crated			
	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
Printer	3,180	1,020	1,320	300	3,500	1,150	1,700	520

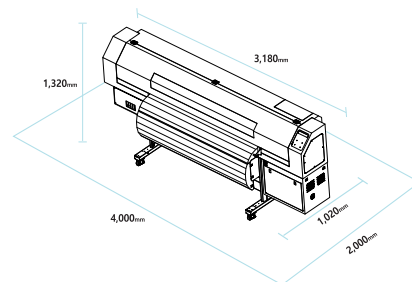

FABRIJET
FT-1908 SE

Printer	Uncrated				Crated			
	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
Printer	3,420	1,020	1,320	320	3,800	1,150	1,710	570

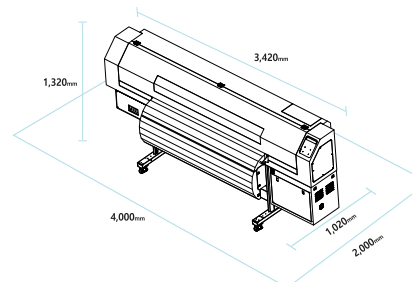

52, Cheongdam-Ro, Yangju-si, Gyeonggi-do, Korea, 11459
 TEL : +82-31-820-8900 A/S : +82-31-820-8880
 FAX : +82-31-820-8990 E-MAIL : sales@dgi-net.com
www.dgi-net.com
www.facebook.com/dgikorea

